

SL-360 Size: AA

› Standard use and stand-by


Performance Data

(Typical values for batteries stored at +25 °C for one year)


| | |
|-----------------------------------|--------------------------|
| System | Lithium Thionyl Chloride |
| Nominal voltage | 3.6 V |
| Nominal capacity | 2.4 Ah |
| Nominal current | 2 mA |
| Max. continuous discharge current | 20 mA |
| Anode surface area | 14 cm ² |
| Lithium content | 0.65 g |
| Weight | 18 g |
| Volume | 8 cm ³ |
| Temperature range | -55 °C ... +85 °C |




Typical Discharge Curves at +25 °C

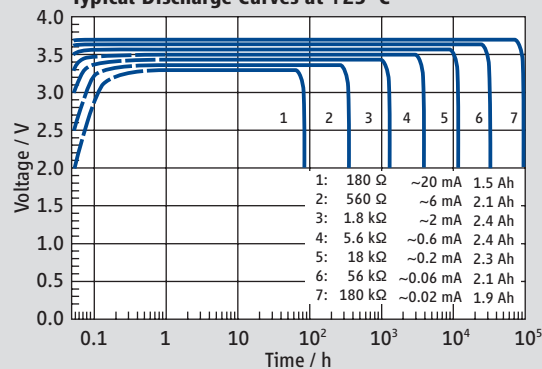


Available Capacity

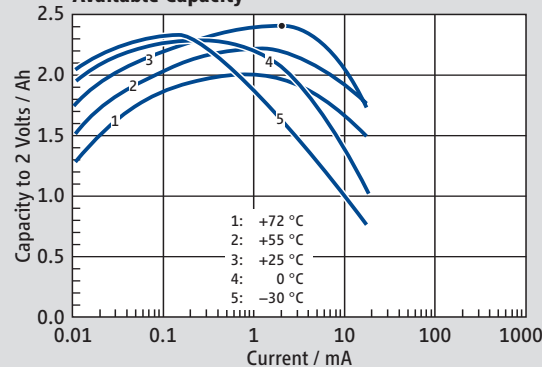


Operating Voltage

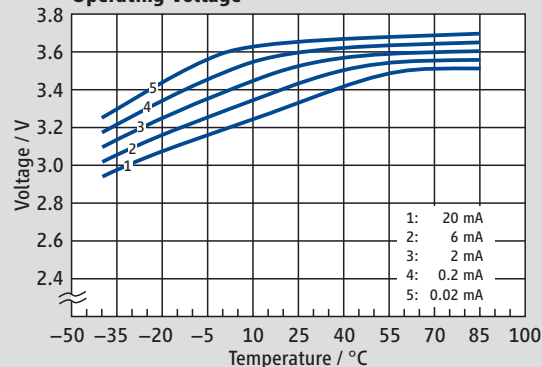


SL-360/S

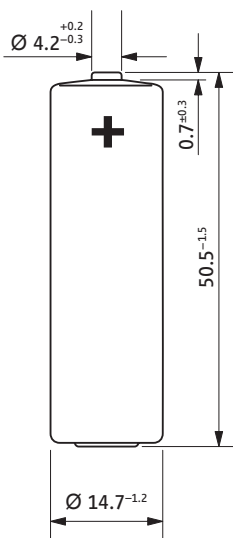


SL-360/T




SL-360/P

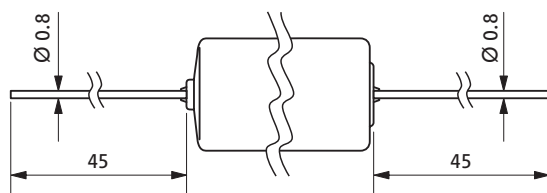

SL-360/PR



SL-360/PT



Available Terminations

Catalogue No.

| | | |
|-----------|----------------|---------------|
| SL-360/S | Standard | 11 1 03601 00 |
| SL-360/T | Tags | 11 1 03602 00 |
| SL-360/P | Pins | 11 1 03603 00 |
| SL-360/PR | Pins radial | 11 1 03606 00 |
| SL-360/PT | Polarized tags | 11 1 03608 00 |

WARNING:
Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.

CELL PACK SOLUTIONS

Telephone: +44 (0)191 496 9999
Email: batteries@cellpacksolutions.co.uk
Website: www.cellpacksolutions.co.uk