

SL-889

Size: 1/10D

> XOL – extended operating life


Performance Data

(Typical values for batteries stored at +25 °C for one year)


System	Lithium Thionyl Chloride
Nominal voltage	3.6 V
Nominal capacity	1 Ah
Nominal current	0.5 mA
Max. continuous discharge current	10 mA
Pulse current capability	20 mA
Anode surface area	7.5 cm ²
Lithium content	0.3 g
Weight	16 g
Volume	5 cm ³
Temperature range	-55 °C ... +85 °C




SL-889

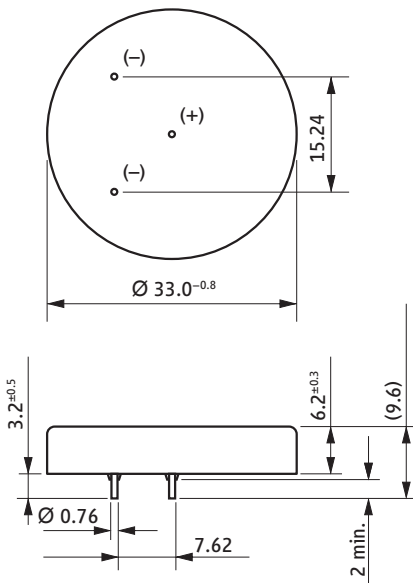


Typical Discharge Curves at +25 °C

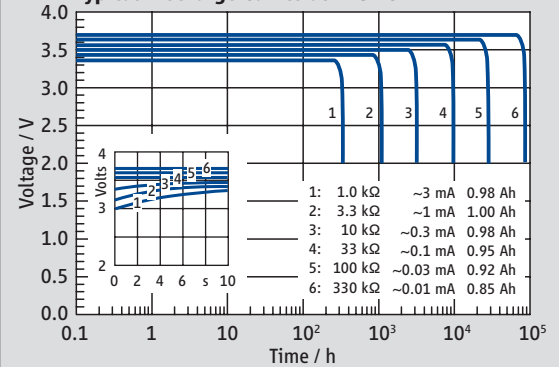

Available Capacity

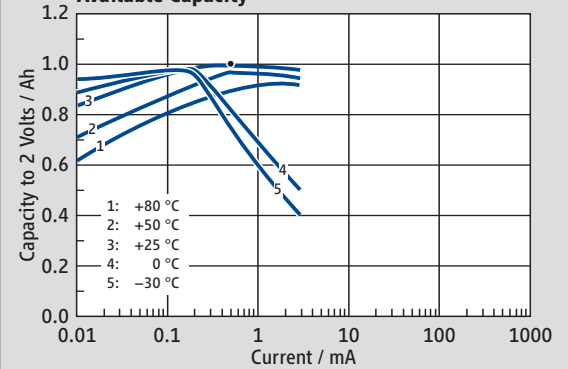

Operating Voltage

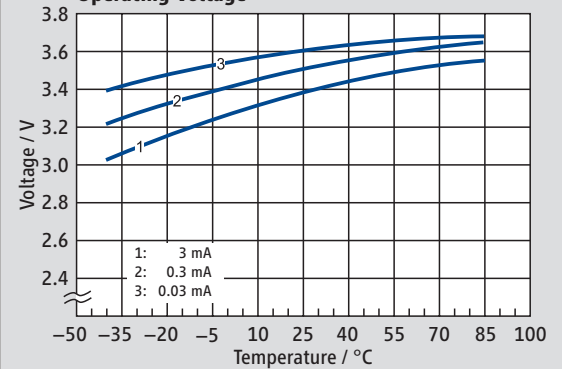

Available Terminations

SL-889/P Pins

Catalogue No.

11 1 18894 00

WARNING:
Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.

Any values given here are for informational purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.

CELL PACK SOLUTIONS

Telephone: +44 (0)191 496 9999
Email: batteries@cellpacksolutions.co.uk
Website: www.cellpacksolutions.co.uk