


Performance Data

(Typical values for batteries stored at +25 °C for one year)


System	Lithium Thionyl Chloride
Nominal voltage	3.6 V
Nominal capacity	2.4 Ah
Nominal current	1 mA
Max. continuous discharge current	60 mA
Pulse current capability	120 mA
Anode surface area	14 cm ²
Lithium content	0.65 g
Weight	18 g
Volume	8 cm ³
Temperature range	-55 °C ... +85 °C




Typical Discharge Curves at +25 °C

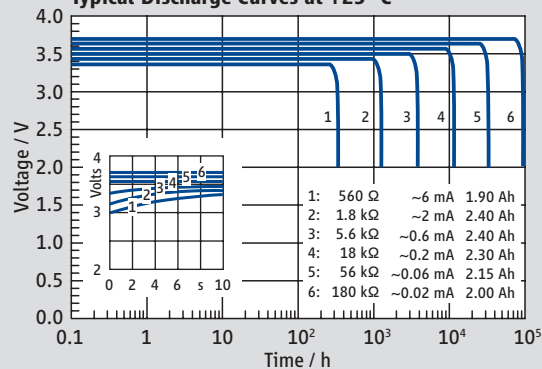


Available Capacity

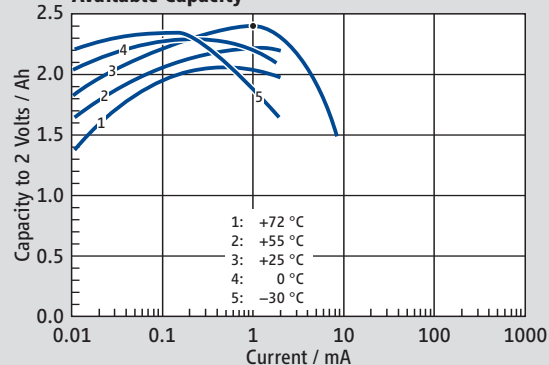


Operating Voltage

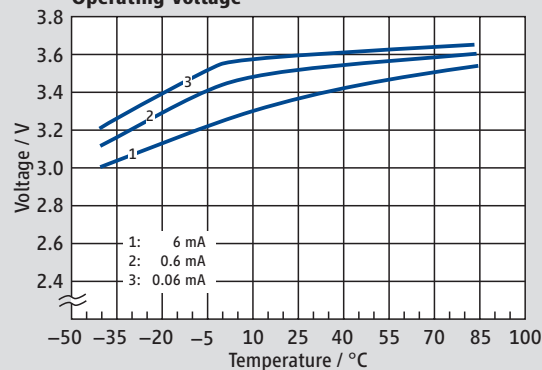


SL-860/S

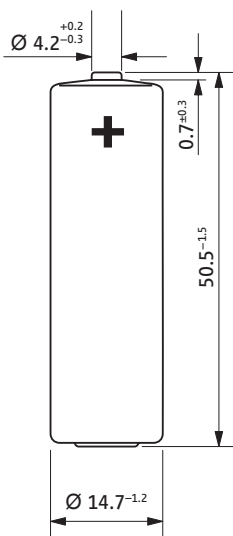


SL-860/T




SL-860/P

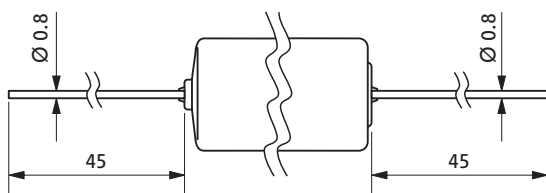

SL-860/PR



SL-860/PT



Available Terminations

Catalogue No.

SL-860/S	Standard	11 1 08601 00
SL-860/T	Tags	11 1 08602 00
SL-860/P	Pins	11 1 08603 00
SL-860/PR	Pins radial	11 1 08606 00
SL-860/PT	Polarized tags	11 1 08608 00

WARNING:
Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.

CELL PACK
SOLUTIONS

Telephone: +44 (0)191 496 9999
Email: batteries@cellpacksolutions.co.uk
Website: www.cellpacksolutions.co.uk